





TEMPERATURE PROBES with type K thermocouple (for thermometers C0311, D0311, C0321, D0321 and monitoring systems MS2+,MS3+,MS4+)




fast response multi-purpose wire probe
lengths 1m, 2m, 3m, 4m

- type GD 260** -65 to 260 °C teflon insulated, 0,8mm diameter
- type GD 700** -65 to 700 °C duplex insulated - glass, 2mm diameter
- type GD 1250** -65 to 980 °C duplex insulated - Nextel ceramic, 4mm diameter


self-adhesive labels 25x40 mm to secure wire probes to surfaces , temperature range -70 to 260 °C, package of 20 labels




fast response surface probe for flat surface
type CP 500 -65 to 500 °C



fast penetration needle probe for soft materials
type CZ 550 -65 to 550 °C



penetration needle probe for soft materials
type CZ 900 -65 to 1000 °C




insertion probe for fluids and gases
type GT1150 -50 to 1150 °C




extension cable type "K" with connectors up to 200 °C, duplex insulated
Please specify length.




subminiature connector
for thermocouples J, K, S
(please specify thermocouple type)
male, female

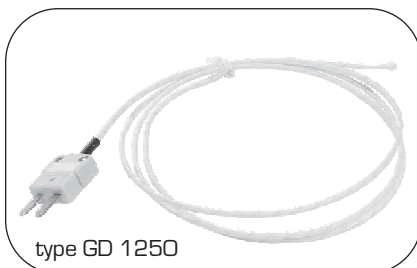

type GD 1250

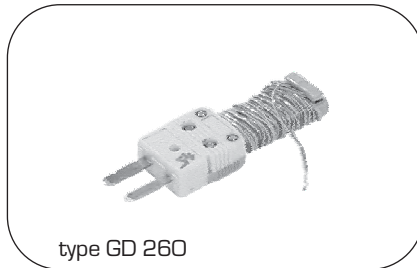

type GD 260

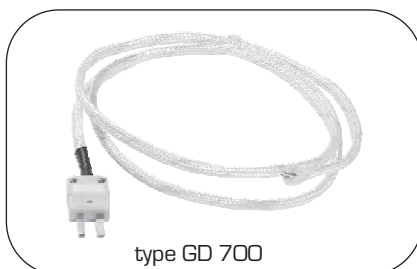

type GD 700



type CZ900



type CP500

probe tolerances:
class 1 in accordance with IEC584-2
 $\pm 1.5^{\circ}\text{C}$ or $\pm 0.004 \times t$
(whichever is greater)